



---

# Harrows

---

**STUMP JUMP  
& DRILL**

---



# HEAVY DUTY STUMP JUMP HARROW


These heavy duty twenty tyned (4 rows wide by 5 rows deep) stump jump harrows have the following features.

- Extra long tyne with the long life fully forged diamond point, for longer wear.
- Tynes have dual bearing surfaces for extra rigidity.
- High quality bolts for tensioning.
- Two attaching points with 16mm holes.

Part No.	HA 4 x 5 SJ
Sizes available	4 wide x 5 deep
Material section	32mm x 10mm high carbon steel
Cross section	Material 320 sq mm
Bolt sizes	16mm (5/8")
Pipe sizes	20mm nominal bore x 2.6mm wall
Bearing surface	Dual bearing tyne
Pull points	Two (2)
Tyne point	Diamond forged
Width of cut	787mm (31")
Weight	43kgs (95lbs)




## STUMP JUMP EXTRAS

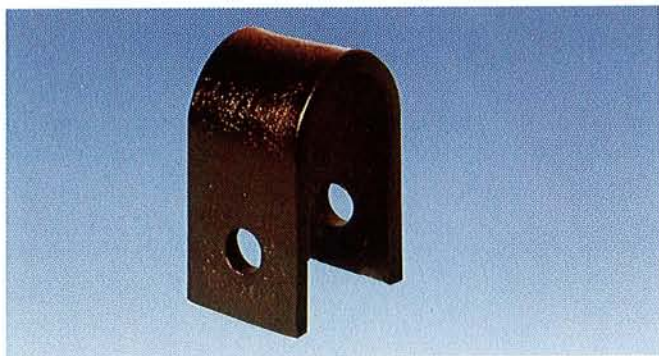

**Chain support harrow clamps** for suspending the harrow section under the harrow beam are also available. The clamps are manufactured from 32mm x 5mm mild steel and feature 10mm (3/8") holes.


Part No.	SJHC
Hole sizes	10mm diameter (3/8")
Width	32mm (1 1/4")

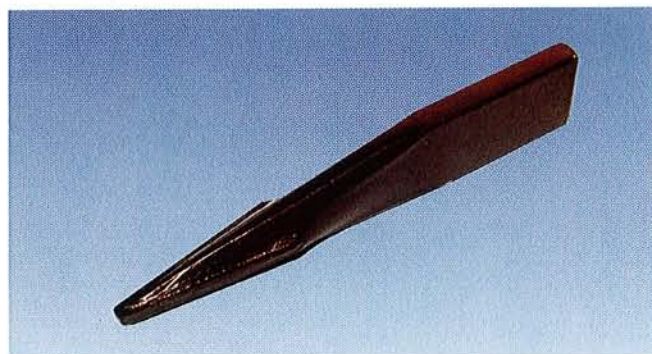

**Weld On Harrow Tips** are available to replace worn parts. Made from the same 32mm x 10mm material section as the original tyne.

Part No.	WOHT
Size	32mm x 10mm x 175mm (1 1/4" x 3/8" x 7")

# STUMP JUMP HARROW SPARE PARTS EXPLOSION

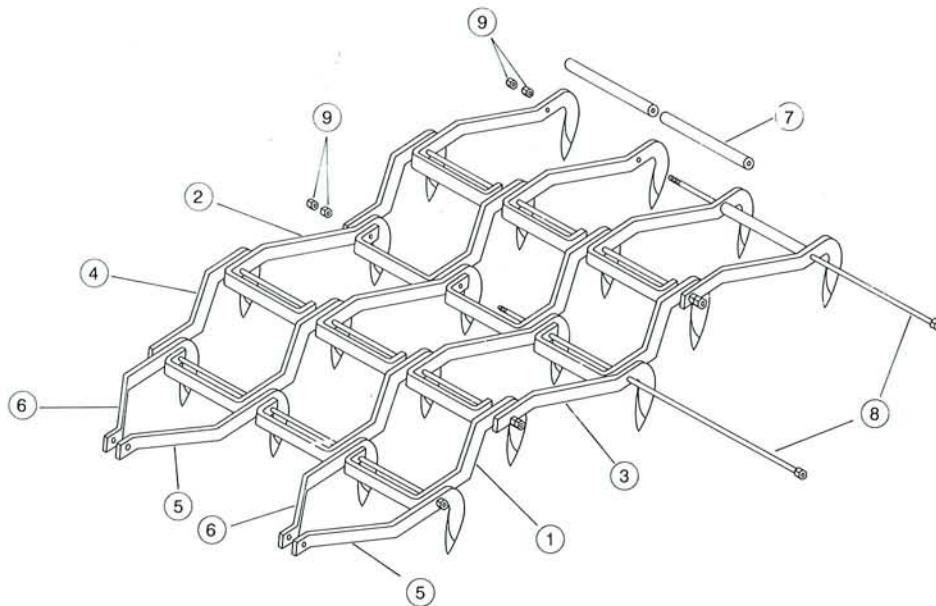

Item No.	Description	Quantity/ Assembly
1	Tyne centre-right hand	6
2	Tyne centre-left hand	6
3	Tyne side-right hand	2
4	Tyne side-left hand	2
5	Tyne front-right hand	2
6	Tyne front-left hand	2
7	Tube spacer	3
8	Bolt 16mm x 700mm long	5
9	Nut hex head 16mm	10

Note: To identify right or left hand crank of tynes, view harrow assembly from the front when towing.

## DRILL (FOLLOWING) HARROWS



**3 x 5 Drill Harrow**

Drill (Following) Harrows are available in a variety of sections and now produced from 25mm x 10mm high carbon steel, and featuring the famous forged diamond



**4 x 3 Drill Harrow**


pointed tynes for longer life. Bundled in lots of 25. Drill harrow hooks (Part No. DHH) are also available.

## DRILL (FOLLOWING) HARROWS SPECIFICATIONS

Part No.	HA3 X 3FH	HA3 X 4FH	HA3 X 5FH	HA4 X 3FH	HA4 X 4FH	HA4 X 5FH
Size (width x depth)	3 x 3	3 x 4	3 x 5	4 x 3	4 x 4	4 x 5
No. of Tyne	9	12	15	12	16	20
Material section	All use 25mm x 10mm high carbon steel					
Cross section	All 250 sq mm					
Bolt sizes	All use 12mm bolts					
Pipe sizes	All 15mm nominal bore x 2.6mm wall					
Pull points	3	3	3	4	4	4
Tyne point	All forged diamond points					
Width of cut - mm	711mm	711mm	711mm	940mm	940mm	940mm
- inches	28"	28"	28"	37"	37"	37"
Weight - kgs	11kg	15kg	19kg	15kg	20kg	26kg
- lbs	24lbs	33lbs	42lbs	33lbs	44lbs	57lbs

# DRILL HARROW SPARE PARTS EXPLOSION

Item No.	Description	Quantity per model					
		3 x 3	3 x 4	3 x 5	4 x 3	4 x 4	4 x 5
1	Hook 10mm dia	3	3	3	4	4	4
2	Bolt 12mm x 520mm long	3	4	5	-	-	-
3	Bolt 12mm x 770mm long	-	-	-	3	4	5
4	Tube spacer 230mm long	2	2	2	3	3	3
5	Tube spacer 220mm long	4	6	8	6	9	12
6	Front tyne	3	3	3	4	4	4
7	Tyne left hand crank	3	6	6	4	8	8
8	Tyne right hand crank	3	3	6	4	4	8
9	Front tyne and hook assy	3	3	3	4	4	4
10	Nut hex 12mm	6	8	10	6	8	10

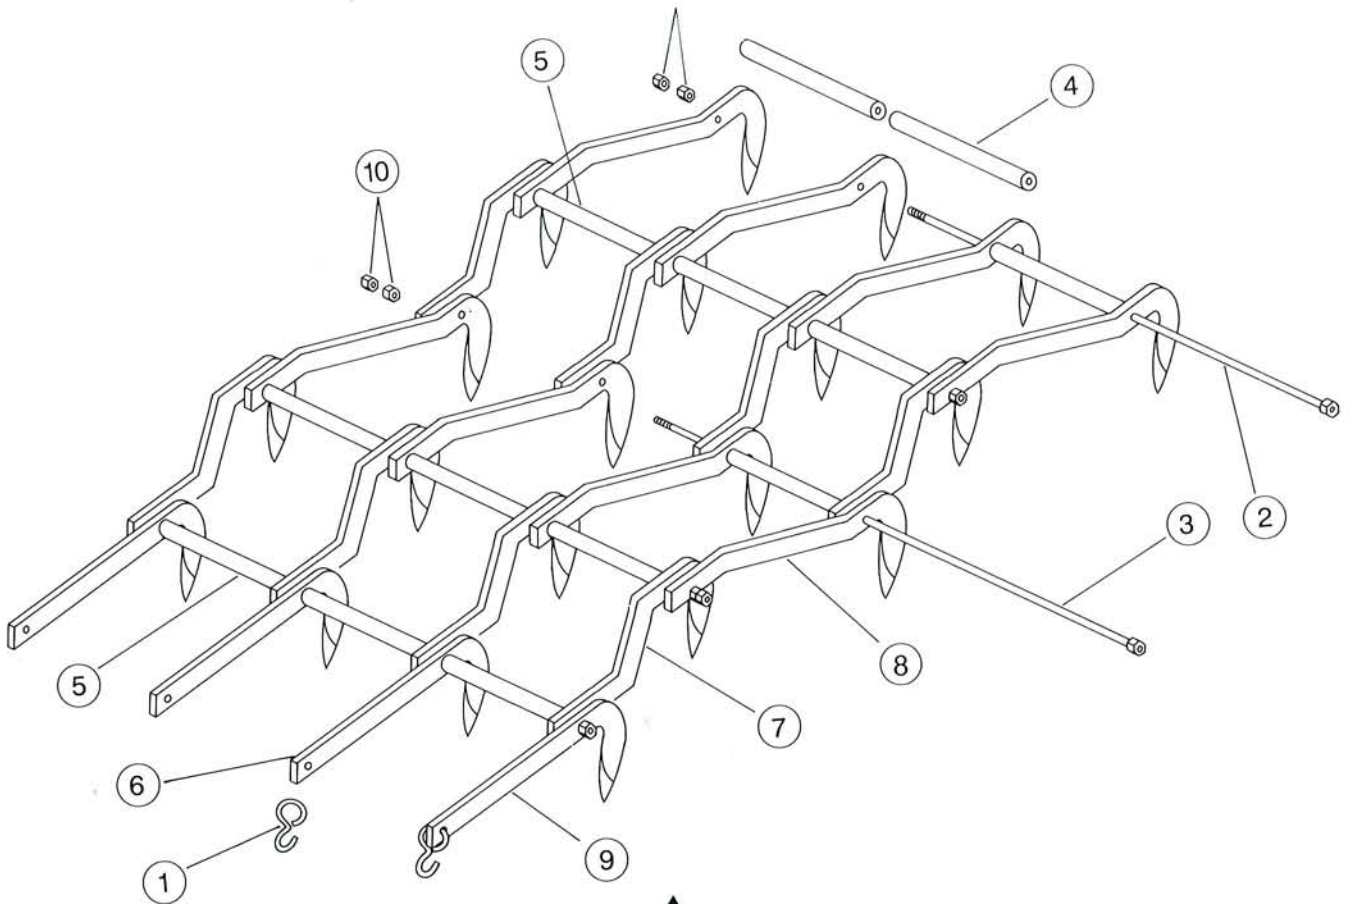

Manufactured by Osmundson Australia Pty Ltd  
 ABN 80 094 494 363  
 Trading as AGPOINT AUSTRALIA  
 Borrow Street, FREELING SA 5372  
 Free Call 1800 088 538  
 Free Fax 1800 802 394

For further information please contact:

or ring 1800 088 538 for the name of your local stockist.